Occhio

Sento sospeso »cc« trimless cutsheet

LED suspended luminaire with double sided light output, luminous power 2 x 18W (version with chrome finish 2 x 13W).
Lighting effect changeable via optional inserts.

Trimles-version with height adjustment
LED suspended luminaire freely height adjustable incl. plaster plate for flush mounting on hollow ceiling, connection to constant current source (driver).
Extern dimmable (depending on the power supply unit).

Trimles-version with fixed length
LED suspended luminaire with fixed height adjustment incl. plaster plate for flush mounting on hollow ceiling, connection to constant current source (driver).
Extern dimmable (depending on the power supply unit).

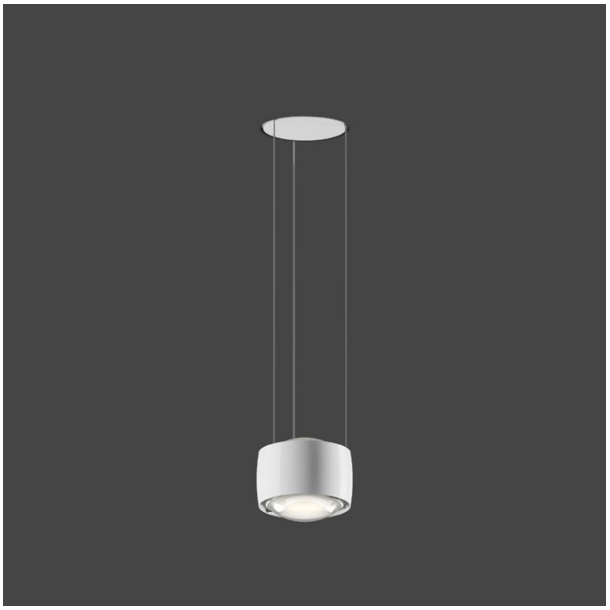

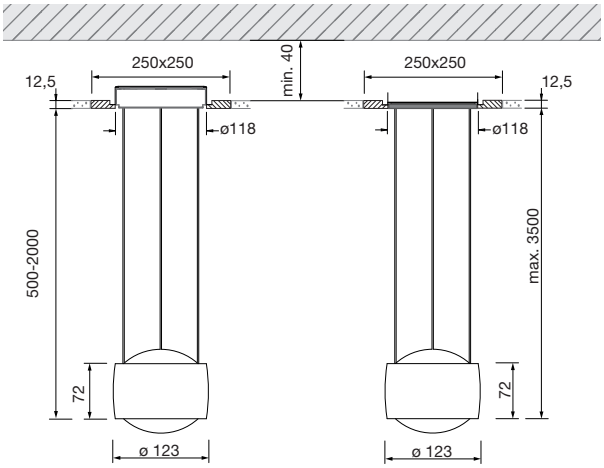

materials luminaire
aluminium, steel chrome-plated, painted or anodised, plastic

materials inserts
glass, optical plastic

surface head
chrome, matt chrome, glossy white (bianco), matt white

on request
glossy black (nero), matt black

freely height adjustable
only variable version

length
variable
500 – 2000 mm
fix
max. 3500 mm

weight
variable 2,4 kg
fix 1,9 kg

dimming function
with trailing edge phase-cut dimmer, push button, DALI or 1-10 V (depends on driver)

ECG (driver)
remote, driven by constant current source
max. 2 x 500 mA / 36 V DC

Occhio »next generation« LED

					LED high color		LED high flux		
average lifetime	t	> 50.000 h	color rend. index	CRI	Ra 95	Ra 95	Ra 85	Ra 85	Ra 85
efficiency class	EEC	A + / A	color temperature	T	2700 K	3000 K	3000 K	3500 K	4000 K
			recommended usage		residential and public		public		
power head current	P I	2 x 18 W max. 2 x 500 mA (> 36 V DC)	luminous flux LED	ø	3100 lm	3100 lm	3800 lm	3800 lm	3800 lm
power head current	P I	2 x 13 W (head chrome) max. 2 x 350 mA (> 36 V DC)	luminous flux LED	ø	2250 lm	2250 lm	2750 lm	2750 lm	2750 lm

IP20

Sento sospeso »cc« trimless
lighting effects

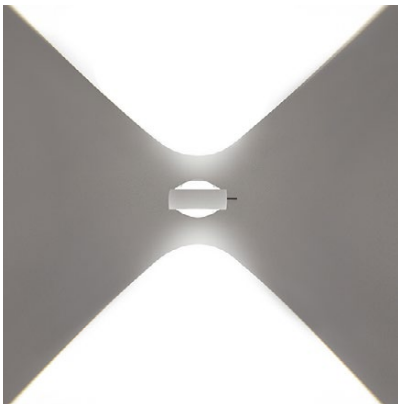

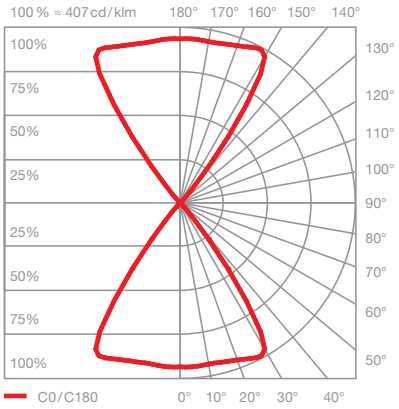

Sento D LED

directed light in both directions
beam angle approx. 80°

insert:	lens	
	lens	
luminous flux:	high color 2 x 18 W	2380 lm
	high flux 2 x 18 W	2920 lm
	head chrome	
	high color 2 x 13 W	1730 lm
	high flux 2 x 13 W	2110 lm

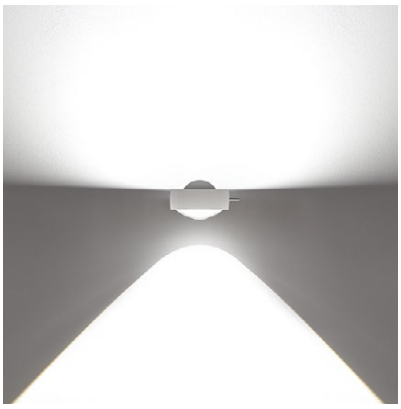

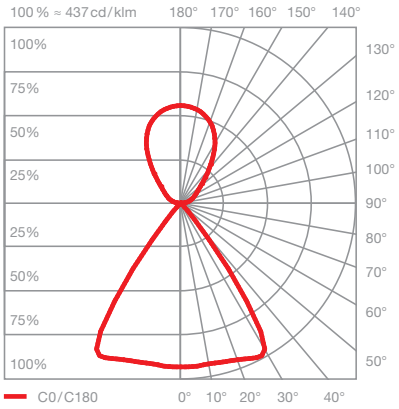

Sento E LED

diffuse up light
directed down light
beam angle approx. 80°

insert:	diffusor glass	
	lens	
luminous flux:	high color 2 x 18 W	2230 lm
	high flux 2 x 18 W	2730 lm
	head chrome	
	high color 2 x 13 W	1620 lm
	high flux 2 x 13 W	1970 lm

Sento sospeso »cc« trimless
article numbers

suspended luminaires with double-sided light output version fix cable length adjustable when mounting, max. 350 cm
version variable continuous height adjustment, 50 – 200 cm
head ø 123 mm, H 72 mm

incl. »next generation« LEDs, total power 2 × 18 W (chrome 2 × 13 W), connection to constant current source (remote driver), externally dimmable via leading- / trailing-edge phase cut, push button, DALI depend on the power supply unit

color versions head / base	**color code**
chrome (26 W)	C
matt chrome	M
glossy white	B
matt white	W

base version trimless: W

with plastering element for flush ceiling-mounted installation, external converter

plastering element 250 × 250 mm, T 12,5 mm
installation depth min. 30 mm

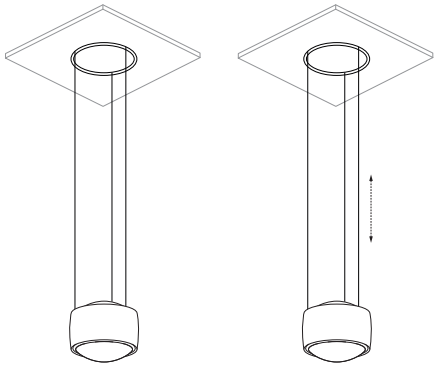

fix variable

lighting effects		high color CRI 95, 2700 K	high color CRI 95, 3000 K
lighting effects D up- / downlight each lens 80° + soft edge glass	**fix »cc«**	6E 18 90 D 2 _	6E 18 90 D 3 _
	variabel »cc«	6E 17 90 D 2 _	6E 17 90 D 3 _
lighting effects E uplight diffusor glass / downlight lens 80° + soft edge glass	**fix »cc«**	6E 18 90 E 2 _	6E 18 90 E 3 _
	variabel »cc«	6E 17 90 E 2 _	6E 17 90 E 3 _

please add color code
also available as »high flux« version with 3000 K / 3500 K / 4000 K

inserts (optional)		art. no.
filter red		8K 60 2R
filter green		8K 60 2G
filter blue		8K 60 2B
filter yellow		8K 60 2Y
filter magenta		8K 60 2M
only in combination with lens		8K 60 40
satinised glass		1X 00 60 3
spot lens (recommended for use with soft edge glass)		8K 60 80
fresnel lens (for additional focusing use with spot lens)		

Sento sospeso »cc« trimless connection diagrams

art. no.

driver pack dimmable via trailing-edge phase cut dimmer
driver fits through ceiling cut-out ø 68 mm

2 × 18 W version 6Z 18 55 2
2 × 500mA constant, L 119 × B 53 × H 30 mm

2 × 13 W version chrome 6Z 13 353 2
2 × 350mA constant, L 119 × W 53 × H 25 mm

dimming via trailing-edge phase cut dimmer

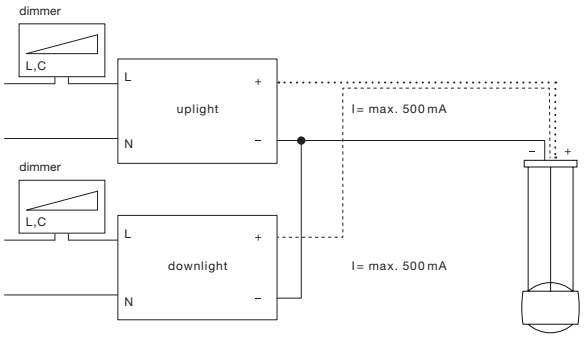

driver pack dimmable via push button / DALI
driver fits through ceiling cut-out ø 68 mm

2 × 18 W version 6Z 18 52 2
2 × 500mA constant, L 207 × W 42 × H 31 mm,
can be used with emergency power

2 × 13 W version chrome 6Z 13 352 2
2 × 350mA constant, L 167 × W 42 × H 31 mm,
can be used with emergency power

dimming via push button

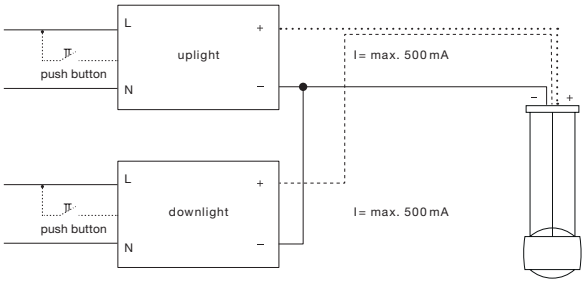
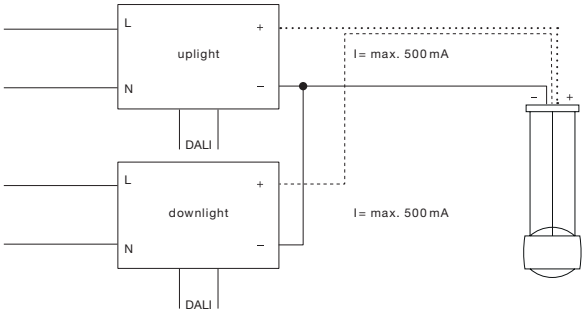
dimming via DALI